



564 Black Glass Fireback Installation Instructions (96100205)

Compatibility

- 564 SS
- 564 HO Ember-Fyre (you must order hearth plate sku# 250-03768)
- 564 HO Dancing-Fyre (you must order hearth plate sku# 250-03768)

NOTE: These firebacks do not work with 564 HO Diamond-Fyre

Packing List

- (1) Rear Fireback
- (2) Side Firebacks

GLASS FIREBACK WARNINGS

HANDLING THE FIREBACKS: The glass firebacks are fragile – especially the edges. Take care to prevent contacting/scraping the glass against metal or rough surfaces. You may wish to lay out a blanket during installation in case you need to set the firebacks down.

We recommend the use of gloves and safety glasses during the installation of the glass firebacks.

CLEANING

These firebacks require periodic cleaning. Do not use ammonia-based cleaners (this may cloud the glass). We recommend ammonia-free glass cleaner (i.e. vinegar and water) to clean the fireback.




- Install the firebacks after the fireplace is in position.
- Install the firebacks before installing the log set.

Installation

WARNING Turn off gas to the appliance and make sure it has fully cooled prior to conducting service.

1. Access the firebox (see the installation manual for details).
2. Remove the grate (see instructions below).

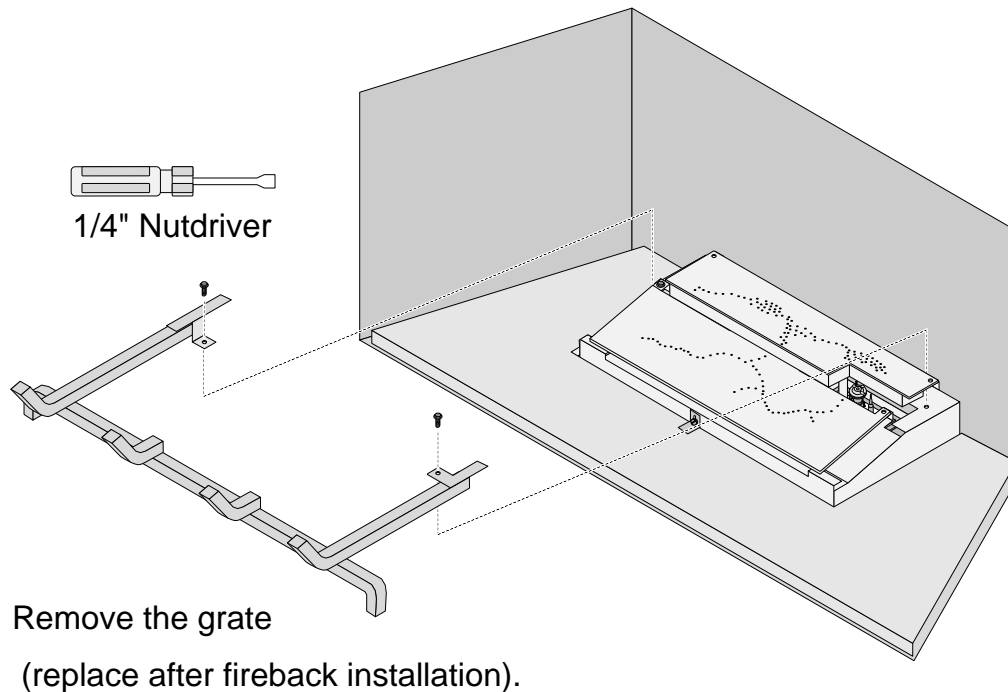

564 Black Glass Fireback Installation Instructions (96100205)


3. Install the firebacks following the directions below.



564 HO Installation (Ember-Fyre and Dancing-Fyre Only)

These firebacks are installed at the same time as the burner (see burner instructions). Make sure to use the revised hearth plate (250-03768) when using the black glass firebacks. Install the new hearth plate BEFORE installing the side and rear fireback. The firebacks rest on top of the new hearth plate.


- a** Remove the clips located on the firebox ceiling near the front (both sides). These clips have keyhole slots that allow removal by loosening the screw and sliding the clip out.



Place the rear fireback in place. The side fireback holds the rear fireback in place - hold the rear fireback while installing the side fireback.

b

HINT: Hold the firebacks at an angle and pivot them into place while installing.

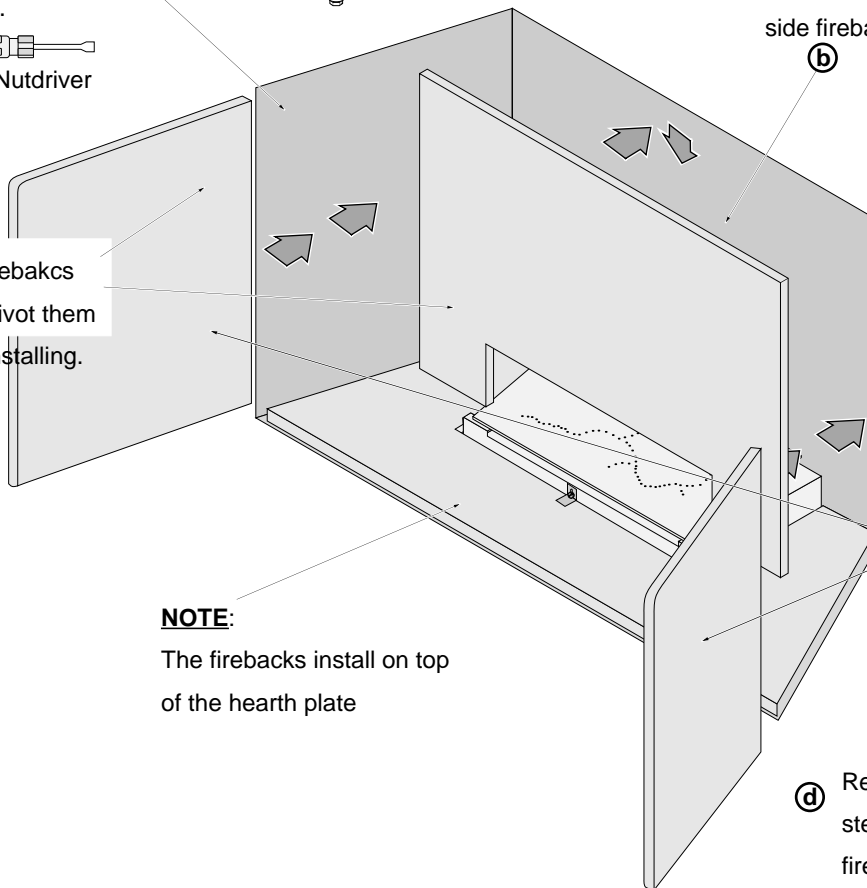

NOTE:
The firebacks install on top of the hearth plate

c Place the side firebacks in place.


d Replace the clips removed in step "a" to secure the side firebacks..



On older 564 fireplaces the glass clip is not long enough to contact the side firebacks. For these fireplaces you can order new clips (250-04787) or bend the existing clips outwards as shown below.

Before

After



4. Restore the fireplace to the correct configuration.